




## INSTALLATION OF LINEAR AND ROUND RIDGES

Ridges are used to cover the top of the roof.

Linear ridges are used on a linear top (e.g. gable roof) when round ridges are used on round or square roofs.

Ridges are placed only when all leaves and hips are fixed up to the top of the roof.

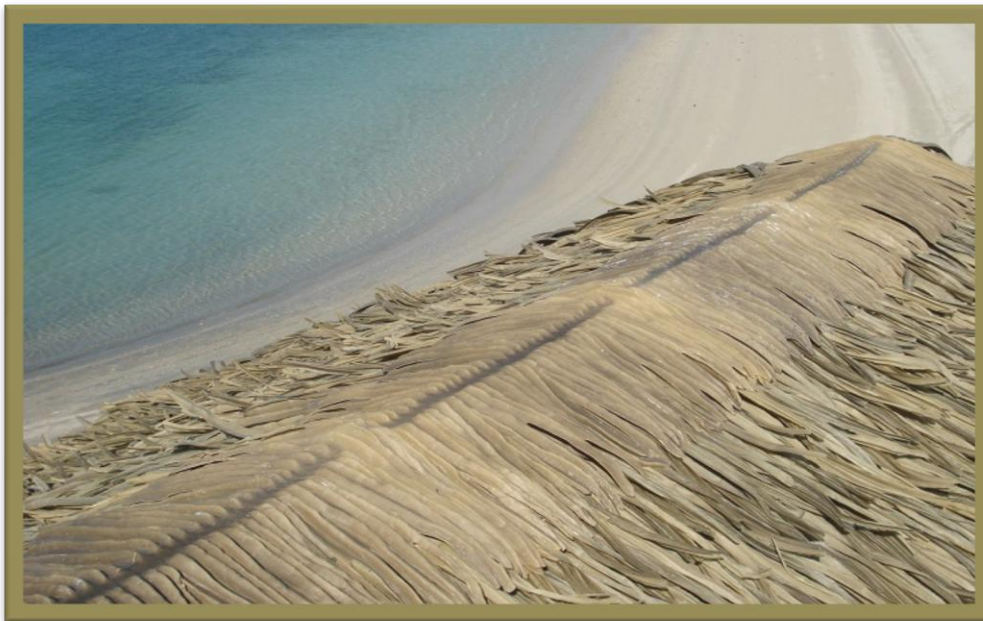

Screw the ridge to the central and vertical beams.

In the case of having several linear ridges, have them overlap one another with a minimum overlap of 13 cm / 5".